


103865 TRAILER FRAME

10712

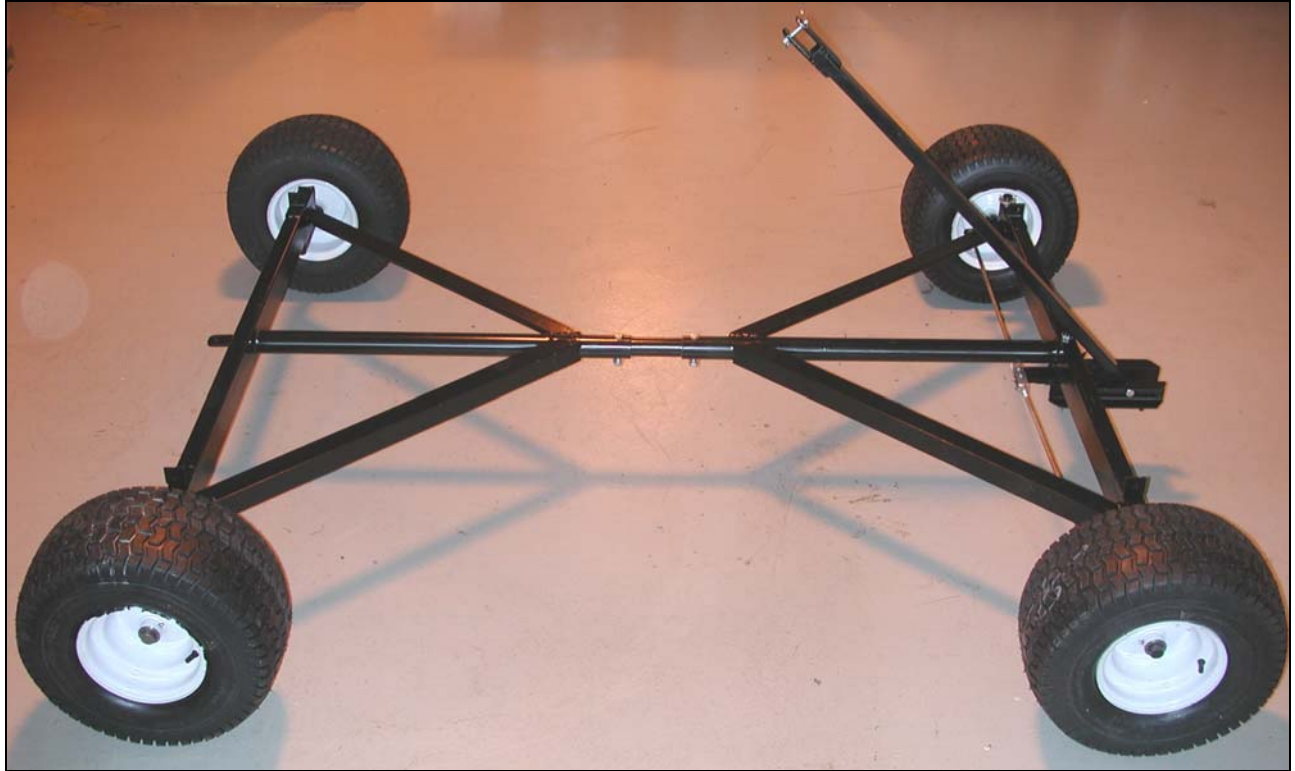

TOOLS REQUIRED

Flat Head Screwdriver
Two Medium Adjustable Wrenches
Tire Gauge
(Recommend Two People for Assembly)



If you have any questions or need additional instructions, call 1-800-245-9881 Monday through Friday, 9:00 a.m. to 5:30 p.m. EST. or email Contactus@FarmTek.com anytime.

PARTS LIST



(4) WHEEL



(1) TONGUE



(1) BACK AXLE



(1) FRAME ADAPTOR




(1) FRONT AXLE



(4) LARGE
WASHER



(4) COTTER
PIN



(1) COTTER
KEY



(1) HITCH
PIN



(2) TONGUE
WASHER



(3) WASHER



(1) SPACER



(1) TONGUE
BOLT



(1) 12x80mm
BOLT



(4) HEX
NUT




(2) 12x70mm
BOLT

ASSEMBLY

Remove parts from box and identify items.


DO NOT TIGHTEN NUTS AND BOLTS UNTIL END

STEP 1: Remove Tongue Bolt, Lock Nut, Tongue Washers, and Spacer from the center of the Front Axle. Align hole in center of axle with hole in center of the Tongue Attachment. Align spacer in between the Tongue Attachment and Axle. Insert Tongue Bolt with Washer through hole. Next, slide on Tongue Washer and smaller washer and then the Lock Nut.

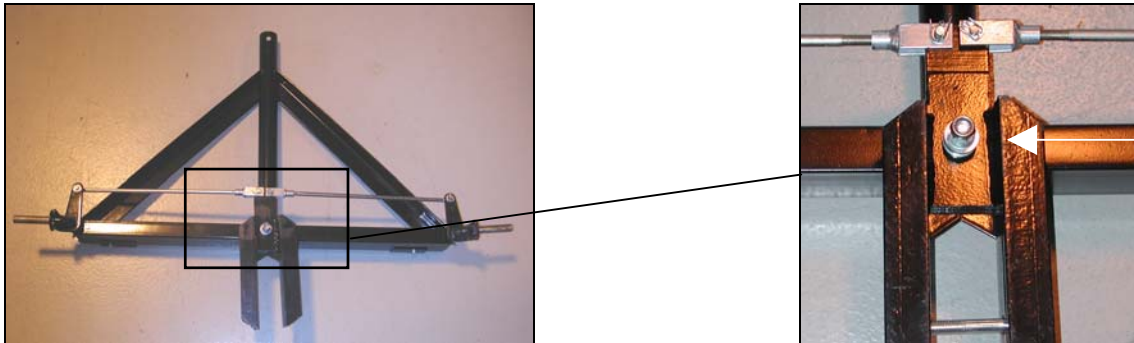

NOTE: *Tongue Attachment is shipped secured to the Tie Rods and Front Axles.*


STEP 2: Slide Wheel onto each side of the *Front Axle*, followed by a Large Washer and Cotter Pin.

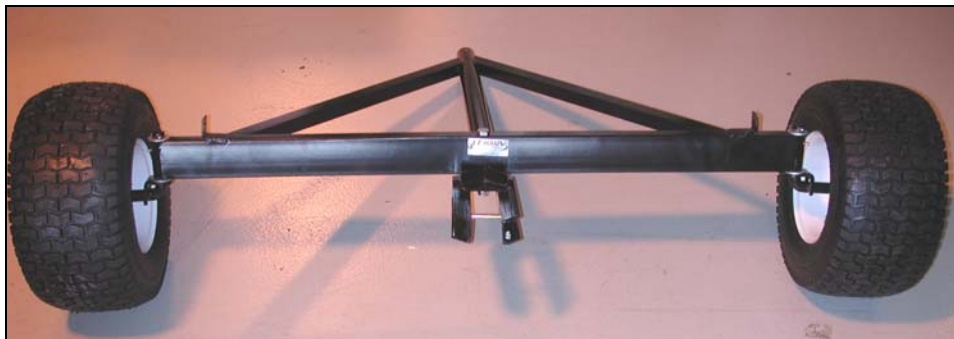

STEP 3: Slide Wheel onto each side of *Back Axle*, followed by a Large Washer and Cotter Pin.




STEP 4: Position both Front and Back Axles as shown below and insert Frame Adapter into ends of both Axles. Slide in until you align holes of Frame Adapter with the holes of the Axles. Secure in place using 12x70mm Bolt, Washer, and Lock Nut. *Install Bolts from the top.*

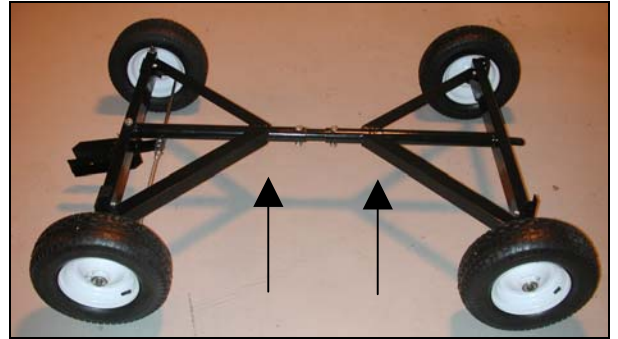

NOTE: There are 2 sets of holes on the Frame Adapter. Determine the desired length and adjust using holes accordingly.

STEP 5: Align holes on the Tongue with the holes on the Tongue Attachment. Secure in place with a 12x80mm Bolt, Washer, and Lock Nut.

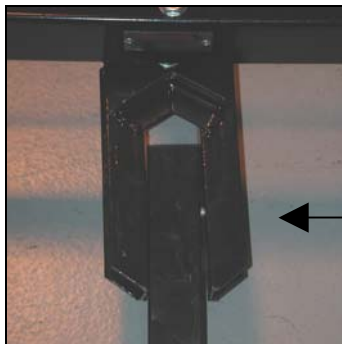

Slide Tongue into groove and secure in place as shown

NOTE: A Hitch Pin with Cotter Key is provided for pulling.

STEP 6: Tighten all connections and inflate Wheels to recommended P.S.I. Also properly grease all joints and Wheels as needed.

NOTE: Periodically check connections to make sure they are tight and secure. Also check Wheels for proper pressure.

CAUTION: Do *NOT* load the Trailer with more than 4000 lbs. Do *NOT* allow children to use the Trailer unsupervised. This Trailer is not a toy. Do *NOT* inflate tires more than 35 P.S.I.